

**Specifications**

**Model Number:** 10-0091  
**Input Voltage:** 120 VAC  
**Frequency:** 50/60 Hz.  
**Lamp Types:** See Chart On Next Page  
**Certifications:** UL #E191525  
**Size:** 8.5" x 1.72" x 1.0"  
**Weight:** 14 oz.  
**Mounting:** Slotted Mounting Tabs



1. Add jumper between socket contacts, of the lampholder, before connecting the RED and YELLOW wires.
2. Ground case in accordance with the National Electric Code.
3. Remote mounting distance varies with lamp type, consult factory with requirements.
4. Cap and insulate any unused RED wire.
5. When connecting two or three RED wires, they must be joined to make one wire before connecting to the lampholder.




10-0091 120V 50/60 HZ	ATLANTIC ULTRAVIOLET CORPORATION 375 Marcus Boulevard • Hauppauge, NY 11788 631.273.0500 • Fax: 631.273.0771 <a href="mailto:info@ultraviolet.com">info@ultraviolet.com</a> • <a href="http://www.ultraviolet.com">www.ultraviolet.com</a> <a href="http://www.buyultraviolet.com">www.buyultraviolet.com</a>	INPUT: 120V AC 50/60HZ MAXIMUM CURRENT: 1.50AMP IPEL EMF: FCC Part 15A SOUND RATING: A CLASS: P TYPE: 1 w 2 Output MAX. VOLTAGE OUTPUT: 400 VAC CIRCUIT OR TO GROUND: INSTANT START MIN. BALLAST START: 100V VAC MIN. LAMP START: 100w 200V SEE LAMP SPEC. FOR WIRING INFORMATION TYPE: H APPROVED - SUITABLE FOR AIR HANDLING SPACES APPROVED FOR LAMP COMBINATIONS OF 120 MAX. WATTS OF CF8P, CF20P, CF24P, CF30P, CROLINE, LINEAR T9HO, T8, T9HO, T8, T9 & T9HO LAMPS, WHEN USED PER WIRING SPEC.	<b>Danger High Voltage</b> Ballast case must be grounded in accordance with National Electric Code. Disconnected input power before installing or servicing. For wiring information, see instruction sheet.	 <b>Surelite™</b> ELECTRONIC BALLAST  #E191525
	 #E191525			

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

**Lamp Types**

Lamp Types	Wiring Diagram
MightyPure® MP49C Lamp Part No. 05-1334-R	1
Sanitron® S50C Lamp Part No 05-1334-R	1
G12T5 - G64T5	1
GPH212T5 - GPH1554T5	2
GHO18T5 - GHO48T5	3
GPH436T5/HO - GPH1148T5/HO	4

This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

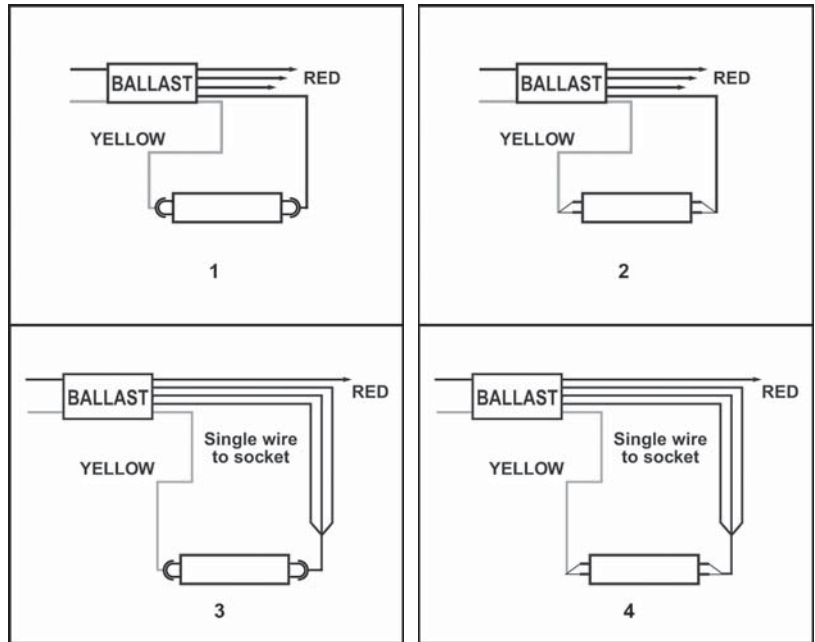

**Wiring Diagrams**

For 4-Pin Lamp Connections Contact Factory