


Ethernet Konverter

Ethernet converter

Ethernet - RS232 –NPort 5110

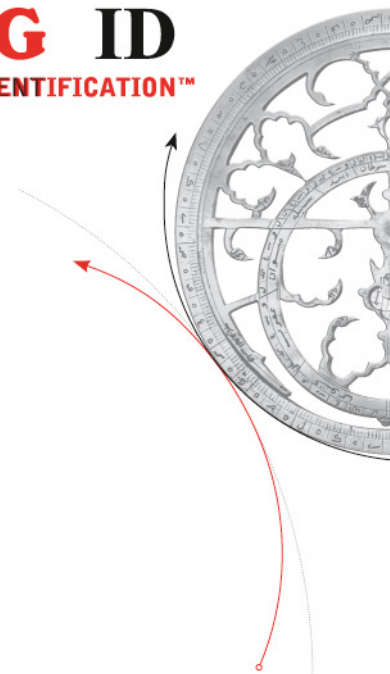

Elektrische Daten | electrical characteristics

System system	Ethernet – RS 232 converter
Schnittstelle interface	Ethernet – RS 232
Software software	Konfigurationssoftware auf CD Configuration SW on CD
Stromversorgung power supply	12V... 30V

Umweltbedingungen | environment

Lagertemperatur storage temperature	0°C bis up to +55°C
Betriebstemperatur operating temperature	0°C bis up to +55°C
Gehäuse Schutzklasse housing protection class	IP 65
Schock&Vibration shock&vibration	IEC 68-2-6 / 29

Befestigung | mounting

2 Befestigungsstreben oder optional
Hutschienenmontage möglich
2 mounting bracelets or optionally mounting on top
hat rail

Abmessungen | dimension

Gewicht weight	Ca. 170 g
Länge length	130 mm
Breite width	80 mm (incl. Top hat rail)
Höhe height	40 mm
Material material	PA6, ABS