

# SLG - POSITIVE DISPLACEMENT SPUR GEAR METER

Ideal for measuring paints & coatings, especially where robotics are utilized or when space is limited.



## APPLICATIONS

In production environments like the automotive industry, a lot of pressure is on line components. While performing under a variety of harsh, fast-paced conditions, flow meters in particular have to be rugged, accurate, and easy to install.

AW Gear Meters exceeds these demands with its SLG Series Positive Displacement Flow

Meters. These stainless steel meters feature small, light bodies, perfect for installation on robotic arms and in other tight areas. Flow meter construction incorporates virtually no "dead space," which allows for extremely efficient flush cycles and worry-free color changes.

## TECHNICAL SPECIFICATIONS

### Measuring Accuracy

± 0.5% over 10:1 turndown with 30cP fluid

### Repeatability

± 0.1%

### Flow Measuring Range

0.003 to 0.5 gpm  
0.01 to 1.0 gpm  
0.02 to 2.0 gpm

**Maximum Operating Pressure**  
up to 2,000 psi

**Maximum Fluid Temperature**  
350°F (180°C)

### Ports

Bottom ported through hole or 1/8" BSPP - specify upon ordering

## BENEFITS

### Strong, Compact Design

The SLG's solid stainless steel construction and compact size make this meter ideal for robotic applications where there is limited space, weight restrictions and vibration from movement.

### Simple to Install & Use

These meters are easy to use and install, since there is no need for straight run piping upstream or downstream of the flow meter.

### Accurate and Reliable

This meter has the ability to maintain consistent accuracy despite changing viscosity conditions, with accuracy of +0.5% of reading.

### Flexible

Meter may be used in applications requiring bi-directional flow, and is offered in three different flow ranges (0.003 to 2.0 GPM).

## MATERIALS OF CONSTRUCTION

<b>Body</b>	JVS: 316 stainless steel (2,000 psi max)
<b>Gears</b>	Stainless Steel, DIN 1.4122
<b>Seals</b>	JVS: PTFE O-ring
<b>Bearings &amp; Shaft</b>	Tungsten Carbide

## RECOMMENDED SENSORS


Sensor Type	Model	Sensor Features
Single sensor	CAPM-30	Intrinsically safe, frequency output (when used with a barrier)
Fiber Optic System (includes the following:)	FOP 30/S	
Fiber optic sensor	FOP-30	Fully isolated optical signal, intrinsic safe
Light-to-frequency converter	OPTV-20	Converts optical output to frequency output
Standard heavy-duty fiber optic cable	Fiber optic cable	Available in 30, 40, 60 & 100 foot lengths

# SLG - POSITIVE DISPLACEMENT SPUR GEAR METER

*Ideal for measuring paints & coatings, especially where robotics are utilized or when space is limited.*

## METER DATA

Meter Size	Flow Range (GPM)	Impulses/ Gallon	Impulses/ cc	Weight (Lbs / Kg)	Ports	Filtration (microns)	Pressure Rating
JVS-10SLGS	0.003-0.5	100,300	26.5	2.75 / 1.25	1/8" BSPP	120	2,000 psi
JVS-10SLGFS	0.003-0.5	100,300	26.5	2.75 / 1.25	6 mm (not threaded)	120	2,000 psi
JVS-15SLGS	0.01-1.0	31,000	8.2	2.75 / 1.25	1/8" BSPP	120	2,000 psi
JVS-15SLGFS	0.01-1.0	31,000	8.2	2.75 / 1.25	6 mm (not threaded)	120	2,000 psi
JVS-20SLGS	0.02-2.0	15,900	4.2	3.0 / 1.36	1/8" BSPP	120	2,000 psi
JVS-20SLGFS	0.02-2.0	15,900	4.2	3.0 / 1.36	6 mm (not threaded)	120	2,000 psi

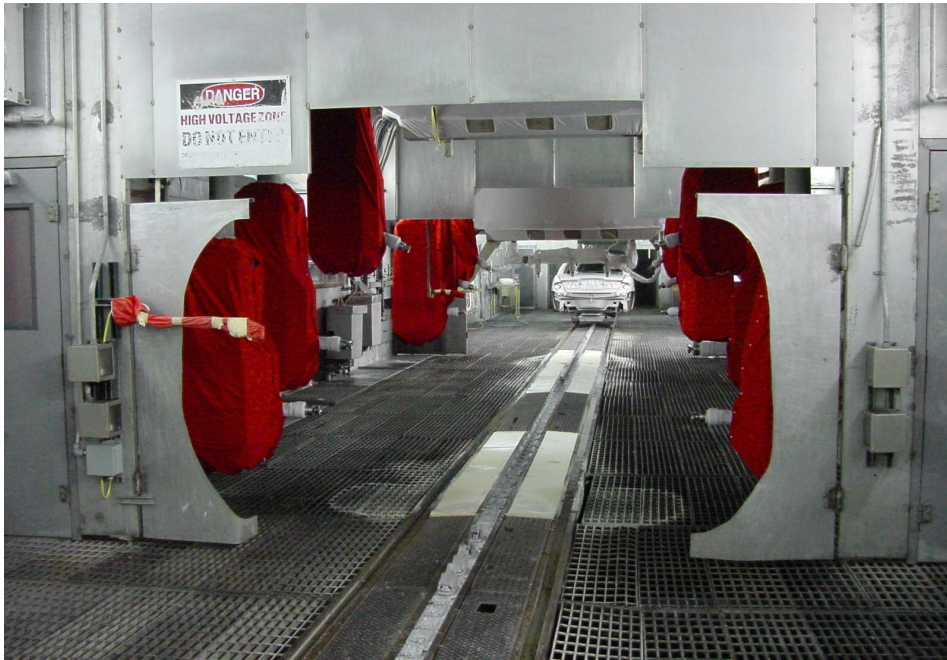

**A COMMON APPLICATION FOR THE SLG GEAR METER IS IN ROBOTIC PAINT LINES IN THE AUTOMOTIVE INDUSTRY.**