


Series 1980 "Bio-Flex" Polyurethane Petroleum Drop Hose

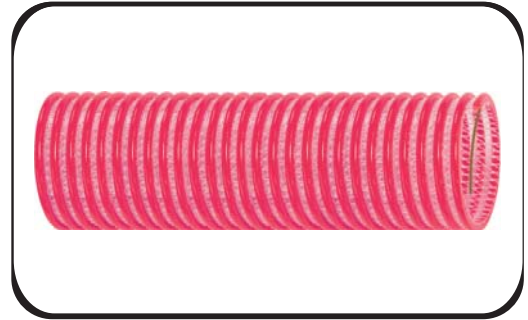

Designed to be Biofuel compatible, this specially formulated polyurethane drop hose handles gasoline, ethanol (up to E98), diesel and biodiesel (up to B100 meeting ASTM D6751 criteria). The polyurethane construction is non-permeable, lighter weight than conventional TPR/Rubber hose, and has superior sub-zero flexibility. The clear side wall of **Series 1980** allows for easy inspection of material flow and the external helix provides for easy drag. **Embedded copper grounding wire safely dissipates static electricity.**

Construction:	Clear Polyurethane w/ Polyester Braid w/ Rigid Red PVC Helix (Static Wire Included)
Temperature:	-40°F to +150°F (-40°C to +65°C)
Color:	Clear w/ Red Helix

Part #	I.D. (In)	O.D. (In)	Bend Radius (In)	W.P. @ 70° F (PSI)	Vacuum Rating (In Hg)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
1980-300	3	3.79	6.0	65	29.8	1.21	100'	Yes
1980-400	4	4.80	8.0	65	29.8	1.71	100'	Yes

Banding Coils (1 piece/2 ends)

Part #	Size (In)	Color
BC-300	3	Clear
BC-400	4	Clear