


## Series 1985 "Bio-Flex" Polyurethane Petroleum Drop Hose

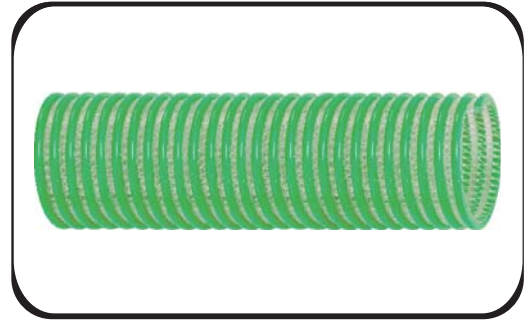

Designed to be Biofuel compatible, this specially formulated polyurethane drop hose handles gasoline, ethanol (up to E98), diesel and biodiesel (up to B100 meeting ASTM D6751 criteria). The polyurethane construction is non-permeable, lighter weight than conventional TPR/Rubber hose, and has superior sub-zero flexibility. The clear side wall of **Series 1985** allows for easy inspection of material flow and the external helix provides for easy drag.

<b>Construction:</b>	Clear Polyurethane w/ Polyester Braid w/ Rigid Green PVC Helix (Static Wire Included)
<b>Temperature:</b>	-40°F to +150°F (-40°C to +65°C)
<b>Color:</b>	Clear w/ Green Helix

Part #	I.D. (In)	O.D. (In)	Bend Radius (In)	W.P. @ 70° F (PSI)	Vacuum Rating (In Hg)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
1985-300	3	3.79	6.0	65	29.8	1.21	100'	Yes
1985-400	4	4.80	8.0	65	29.8	1.71	100'	Yes

### Banding Coils (1 piece/2 ends)

Part #	Size (In)	Color
BC-300	3	Clear
BC-400	4	Clear