


Series 2671

Fire Engine Booster Hose

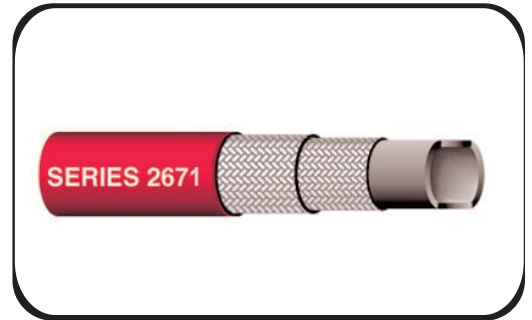

This is a heavy duty hose for high pressure water booster service on fire engines. Tube and cover compounds resist abrasion and weathering. Tough yet flexible, for resistance to flexing and surge loads. Meets NFPA 1961 requirements under current RMA specifications. Meets or exceeds UL92 requirements for 800 PSI Booster Hose. Hose is non-conductive.

Tube:	Synthetic Rubber
Reinforcement:	Multiple textile braids
Cover:	Red synthetic rubber
Temperature:	0°F to +180°F (-18°C to +82°C)
Branding:	Inkjet - white letters
Origin:	USA

Part #	I.D. (In)	O.D. (In)	W.P. (PSIG)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
2671-075	3/4	1.25	1000	.40	100'	Yes
2671-100	1	1.53	1000	.56	100'	Yes