


RM 8110

Interroll Roller Conveyor
Straight
Non-Powered



Dimensions

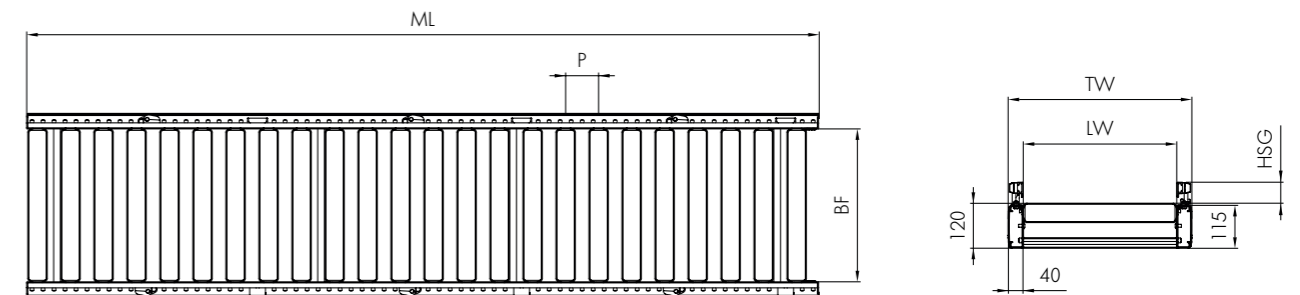

Product Description

The non-powered straight roller conveyor transports materials either manually or via gravity down a slope and is used as an assembly and picking line.

Technical data

General technical data	Max. load capacity	100 kg/m
	Incline/decline	Suitable for slopes
	Ambient temperature	-5 to +40 °C
Roller	Roller type	Interroll Series 1100, Smooth-Running Conveyor Roller Interroll Series 1700, Universal Conveyor Roller
	Roller diameter	50 mm
	Roller material	Steel, zinc-plated PVC

BF	Between frames	420, 620, 840 mm others on request
LW	Lane width	BF (+120/-90 mm per side with flexible side guide)
ML	Module length	Max. 4080 mm
TW	Module width	BF + 80 mm
P	Roller pitch	60/90/120 mm
HSG	Height side guide	35 - 65 mm

Scope of supply

- The module is fully assembled
- Please order support stands and end caps separately