


# Series 4704

## Medium Pressure

### SAE 100R7

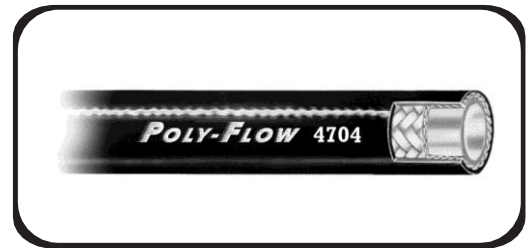

General medium pressure hydraulic applications including material handling and mobile equipment, agricultural equipment, and lubrication systems. "Tuff-Skin" cover has excellent kink resistance and long life. Available in long continuous lengths. For twin-line product, see **Series 4704T**.

<b>Tube:</b>	Polyester elastomer.
<b>Reinforcement:</b>	Single polyester braid.
<b>Cover:</b>	Proprietary polyurethane blend (Tuff-Skin™)-black, perforated.
<b>Temperature:</b>	-40° F. to +212° F. (-40° C. to +100° C.) Limited to +135°F (+57°C) for water-based or fire resistant fluids

Part #	Inside Diameter		Outside Diameter		W.P. (PSI)	Burst (PSI)	Minimum Bend Rad (In.)	Weight Lbs/Ft	Standard Length	Packaging	Coupling Series
	(In.)	(MM)	(In.)	(MM)							
4704-02	1/8	3.2	.32	8.1	3000	12,000	.50	.03	500 ft	Coils	SW
4704-03	3/16	4.8	.42	10.7	3000	12,000	.75	.05	250 ft	Coils	SW
4704-04	1/4	6.4	.48	12.2	2750	11,000	1.5	.05	250 ft	Coils	SW
4704-05	5/16	7.9	.57	14.5	2500	10,000	1.8	.08	250 ft	Coils	SW
4704-06	3/8	9.5	.64	16.3	2250	9,000	2.0	.10	250 ft	Coils	SW
4704-08	1/2	12.7	.81	20.6	2250	9,000	3.0	.15	250 ft	Coils	SW

**Note: Above hose not intended for use in static discharge applications—i.e. airless paint spray.**