


UNISOURCE
Series 401-L
Stainless Steel
Connector,
Threaded

Construction, Materials:

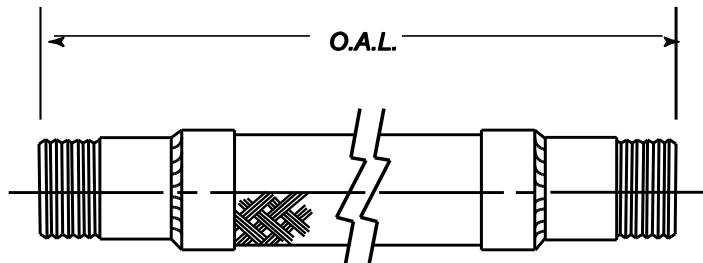

Hose: *Series 300 Stainless Steel Corrugated Hose*

Braid: *Series 300 Stainless Steel. One Braid*

Ends: *Carbon Steel Male NPT.*

Maximum permanent offset from centerline: 2"
Maximum intermittent offset from centerline: 5/8"

Qty	Size (In.)	Part #	Overall Length (Inches)	W.P. @ 70 Deg. F. (psi)	W.P. @ 250 Deg. F (psi)	Approx. Corr Count Per Foot	Min. Bend Rad Static (In.)	Min. Bend Rad Dynamic (In.)	Approx. Weight (Lbs.)
	1/2	401-L-050	10	990	911	108	1.75	7	0.4
	3/4	401-L-075	11	750	690	89	2.5	9.5	0.5
	1	401-L-100	12	605	557	82	3	11	0.8
	1-1/4	401-L-125	13	570	524	67	4	12	1.0
	1-1/2	401-L-150	14	410	377	64	5.5	13	1.3
	2	401-L-200	15	455	419	62	7	16	2.0

Customer: _____
 Project: _____
 Engineer: _____
 PO#: _____



Unisource Series 401-L
Long Threaded Connector