


UNISOURCE
SERIES 402-L
Stainless Steel
Connector,
Flanged

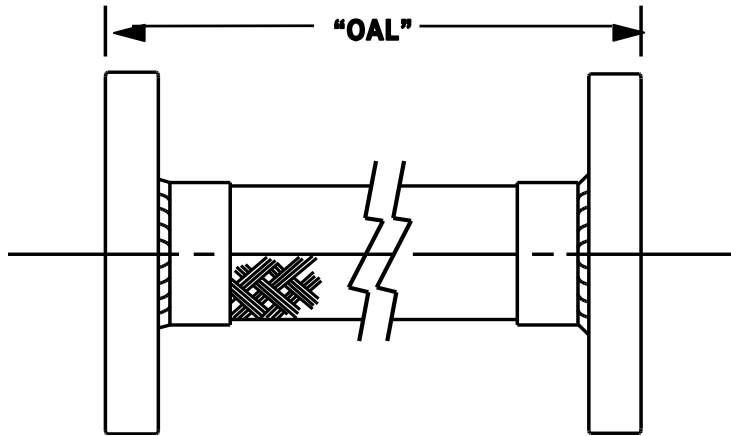

Construction, Materials:

Hose: *Series 300 Stainless Steel
Corrugated Hose .008 to .012 Wall*

Braid: *Series 300 Stainless Steel
One Braid (8" & larger is braided-
braid).*

Ends: *Carbon Steel 150# Drilled
Flat-Face Plate Flanges*

Maximum permanent offset from centerline: 2"
Maximum intermittent offset from centerline: 5/8"

Qty	Size (In.)	Part #	Overall Length (Inches)	W.P. @ 70° F. (psi)	W.P. @ 250° F (psi)	Corrs Per Inch	Min. Bend Rad Static (In.)	Min. Bend Rad Dynamic (In.)	Approx. Weight (Lbs.)
	2-1/2	402-L-250	12	345	317	26	8	18	13.3
	3	402-L-300	13	290	267	30	10	22	14.8
	4	402-L-400	14	250	230	21	13	26	20.0
	5	402-L-500	15	200	184	23	17	34	28.0
	6	402-L-600	16	210	193	25	19	41	32.0
	8	402-L-800	18	190	175	21	23	50	58.0
	10	402-L-1000	22	150	138	18	29	67	76.0

Customer: _____

Project: _____

Engineer: _____

PO#: _____

UNISOURCE MFG.

*Unisource Series 402-L
Stainless Steel Flanged Connector*