


**Gas-Phase Chemical Media**

SAAFBlend™ GP SC

**Product Overview**

- Targets reactive compounds and volatile organic compounds
- Accurate service life testing
- Suited for use in commercial and industrial applications
- Target contaminants include:
  - Formaldehyde
  - Hydrocarbons (VOCs)
  - Hydrogen sulfide
  - Lower molecular weight aldehydes and organic acids
  - Nitric oxide
  - Nitrogen dioxide
  - Sulfur dioxide

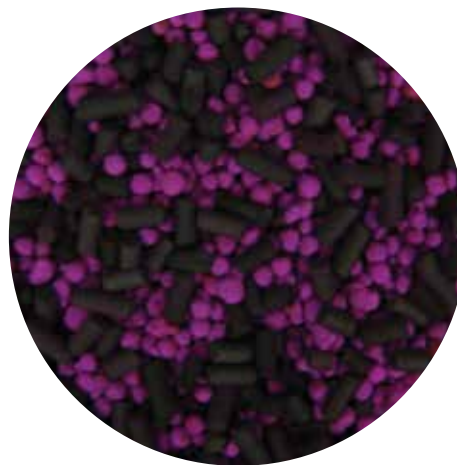

**Specifications**

Media Type	Chemical
Frame Material	None
Max Operating Temperature	125°F (52°C)

**Product Information**

Part Number	Media Type	Media Wgt. per Container (Lbs.)	Shipping Container Volume (Cubic Feet)
<b>Cubic Foot Containers</b>			
395-914-003	SAAFBlend GP SC (50/50 Mix)	43	1.2
<i>NOTE: All media packaged in Cubic Foot Containers is sold per container. Containers cannot be broken.</i>			
<b>Large Super Sack Containers</b>			
395-913-003	SAAFBlend GP SC (50/50 Mix)	1100	27.5
<i>NOTE: All media packaged in Large Super Sack Containers is sold per pound. The weights should be sold in multiples of the container weight.</i>			

GAS-PHASE CHEMICAL MEDIA

AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

[www.aafintl.com](http://www.aafintl.com)

