




ROLL CRUSHER VWR 250.2

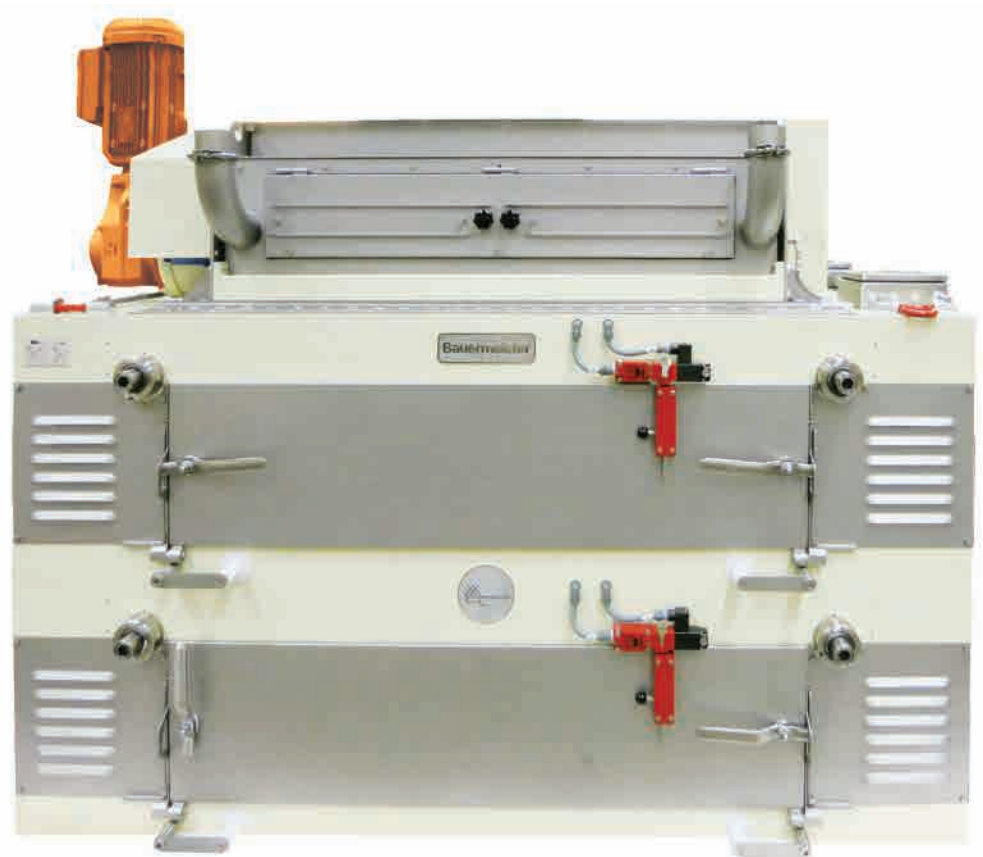

ROLL CRUSHER

VWR 250.2

Designed to grind brittle to hard products to a narrow particle size distribution with minimal dust content the 205.2 series of one-, two- and three-stage roller mills offer

- high throughput
- dust-tight design
- narrow particle size distribution with minimal dust content
- minimal mechanical impact temperature rise of product
- efficient energy initialisation
- low space requirement
- long roll life
- easy access to all machine components
- efficient roll change and maintenance times

Model Range

- ZWR 250.2 - one stage
- VWR 250.2 - two stage
- SWR 250.2 - three stage

(roll Ø: 250 mm; roll lengths: 500 / 900 / 1.300 mm)

Design

- robust, single frame steel and modular construction
- vibration poor

Options

- Product specific feed units
 - vibration type
 - dual type
- Stainless steel for product touching parts
- Aspiration connections
- Temperature monitored roll bearings
- Automatic roll bearing lubrication
- Vibration monitoring
- Potential compensation against static charges
- Product specific roll materials and corrugations
- Water cooled rolls
- Drive Power: 7,5 kW - 22 kW

Features

- manual roll gap adjustment
- optimal roll protection against foreign particles includes in the feed-stock
- dust-tight grinding chamber
- sampling sockets in each passage

HDM-USA | Bauermeister, USA

5100 Poplar Ave | Suite 607 | Memphis, TN 38137 | USA

P +1 901 363 0921 **F** +1 901 794 9679

info.hdm-usa@h-d-m.com | www.BauermeisterUSA.com

