


Series 2160

"Air Drill 300" - Air Hose

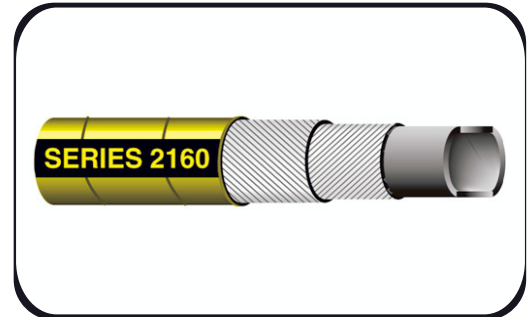

A light and flexible, yet sufficiently rugged hose, to withstand the abuse and hard service found in mining and construction. It has excellent resistance to abrasion, gouging and weathering. **Specially designed for superior flexibility and kink resistance.**

Tube:	Black synthetic rubber (ARPM Class C ORS)
Reinforcement:	Multiple textile plies. (Proprietary design)
Cover:	Yellow SBR/EPDM blend (ARPM Class C ORS)
Temperature:	-20°F to +180°F (-29°C to +82°C)
Branding:	Black Mylar / Yellow letters

Part #	I.D. (In)	O.D. (In)	W.P. (PSI)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
2160-050	1/2	.81	300	.22	100'	Yes
2160-075	3/4	1.14	300	.37	100'	Yes
2160-100	1	1.46	300	.48	50'/100'	Yes
2160-125	1-1/4	1.73	300	.73	50'/100'	400'
2160-150	1-1/2	1.97	300	.85	50'/100'	Yes
2160-200	2	2.52	300	1.12	50'/100'	Yes
2160-250	2-1/2	3.18	300	1.55	50'/100'	400'
2160-300	3	3.62	300	1.86	50'/100'	400'